



Industrial & Commercial LED Lighting Company

4403 Greenbriar Dr, Stafford, Texas 77477
Tel No. 1-800-8385070
Monday - Friday 8:30 AM to 5:30 PM

252X SERIES LINEAR STRIP LED LIGHT



Product Features:

- Emergency backup and sensor optional
- Easy installation, suspending mounting & surface-mounted
- 2FT 4FT 8FT optional
- AC120-277/347V, Ra>80
- High efficacy 130lm/w

Electrical:

- Industrial
- Warehouse
- Garages
- Workshops
- Commercial

PC Lens Chargeable:



Square PC Lens



Round PC Lens



selectable by DIP switch on Driver



3 CCT
(3500K/4000K/5000K) Selectable
for CCT Tunable model only



Removable plate
for connecting easily



0-10V
DIMMABLE




Link able



Wattage Selectable
In same dimension

AC120-277V/347V
2FT 4FT 8FT Length

Dimension & Weight

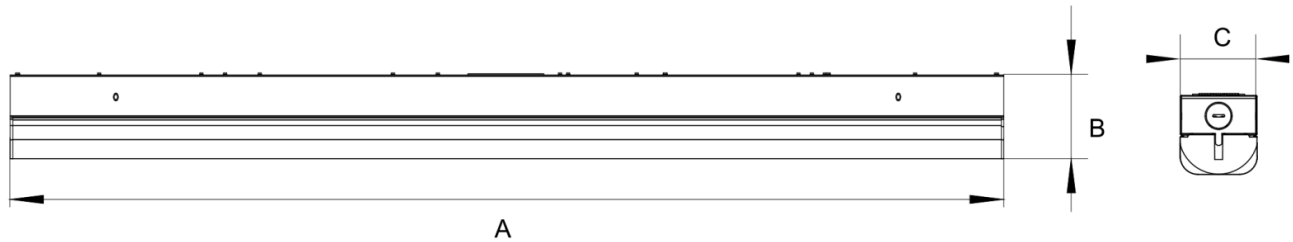


Length \ Size	A	B	C
2FT	23.98 "	2.62 "	2.56 "
4FT	47.99 "	2.62 "	2.56 "
8FT	95.98 "	2.62 "	2.56 "


- 2FT = 0.6m (15W / 18W / 22W / 25W)
- 4FT = 1.2m (30W / 36W / 40W / 50W)
- 8FT = 2.4m (60W / 68W / 72W / 80W)

Installation


Method 1:

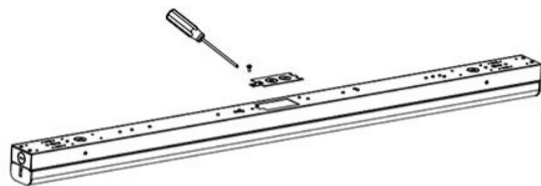


1. Remove the outlet cover with a tool

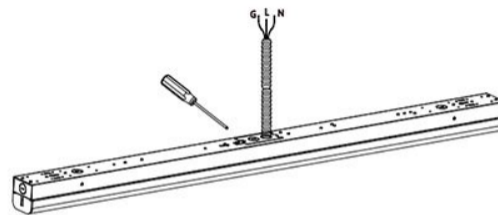


2. Put the input line through the outlet cover plate, Then lock the outlet cover with a tool

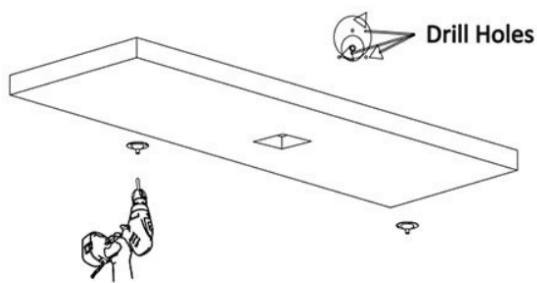


3. Drill three mounting holes in the wall for the retaining disc

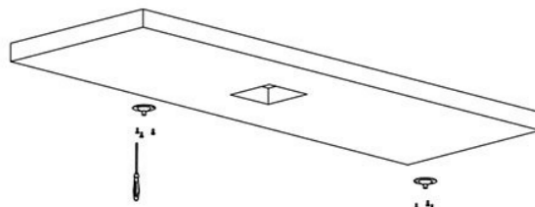

4. Screw the retaining disc to the wall

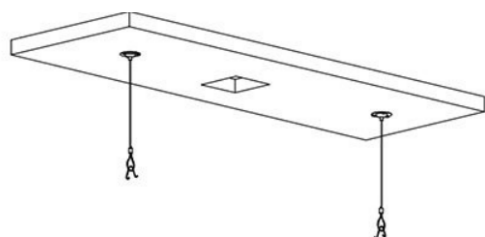

5. Install the sling and hook onto the fixing plate

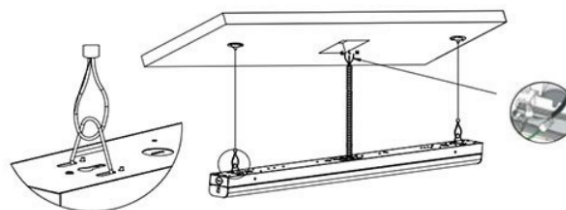

6. Hang the lamp on the hook and connect the connecting hose to the junction box, Connect the wires:
AC/L match black; AC/N match white;
PC/green match ground


Method 2:




1. Pull the part of the lampshade down by hand



2. Untie the steel wire safety rope, Then untie the male female plug-in terminal and terminal

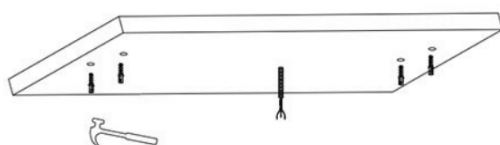


3. First drill holes with tools, and then fix the expansion pipe to the ceiling

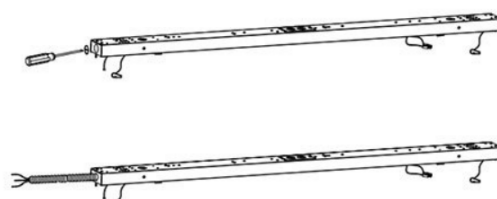


4. Pry off the knock-out hole on the bottom shell with a tool, Secure the threading hose bottom shell


DVDLIGHTS - INDUSTRIAL & COMMERCIAL LED LIGHTING COMPANY - 252X SERIES LINEAR STRIP LED LIGHT

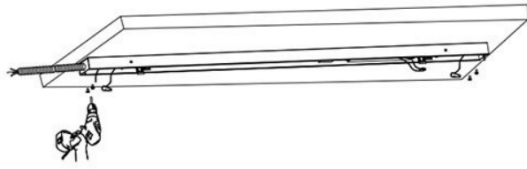

5. Fix the bottom shell to the wall with tools

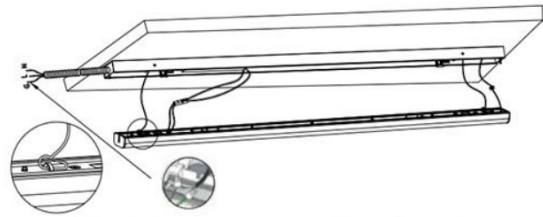


6. Hook the lamp cover with safety wire rope and plug in the plug-in terminal and ground terminal, Connect the wires: AC/L match black; AC/white; PC/green match ground



7. Press the lamp cover part in, fix it completely

Packaging Details

Model	Carton Dimension	Qty / Carton	N.W	G.W
2FT	25.4"*6.3"*6.3"	4PCS	9.1lbs	10.77lbs
4FT	49.4"*6.3"*6.3"	4PCS	14.48lbs	19.27lbs
8FT	97.44"*6.3"*6.3"	4PCS	30lbs	36.31lbs

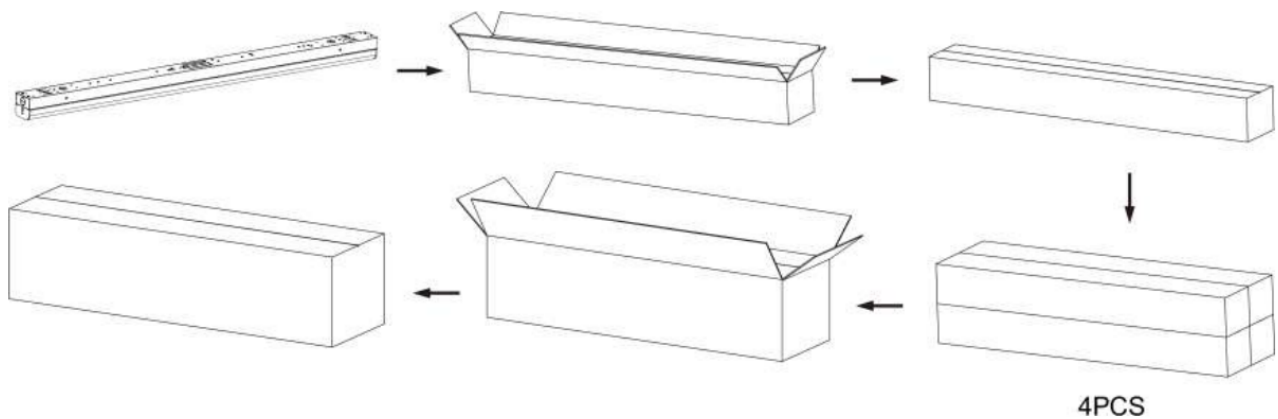

One led linear strip light in one inner box, one outer box put four pcs.

Safety Precautions

- To reduce the risk of death, personal injury, or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards read all warnings and instructions included with and on the fixture box and all fixture labels.
- Before installing, servicing, or performing routine maintenance on this equipment, follow these general precautions.
- Commercial installation, service, and maintenance of luminaires should be performed by a qualified licensed electrician.
- For The installation: If you are unsure about the installation or maintenance of the luminaires, consult a qualified licensed electrician and check your local electrical code.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.

WARNING: RISK OF FIRE OR ELECTRICAL SHOCK

- Turn off electrical power at fuse or circuit breaker box before wiring the fixture to the power supply.
- Turn off the power when you perform any maintenance.
- Verify that the supply voltage is correct by comparing it with the luminaire label information.
- Make all electrical and grounded connections in accordance with the National Electrical Code and any applicable local code requirements.
- All wiring connections should be capped with UL approved wire connectors.

CAUTION: RISK OF INJURY

- Avoid direct eye exposure to the light source while it is on.
- Account for small parts and destroy packing material, as these may be hazardous to children.