



Industrial & Commercial LED Lighting Company

4403 Greenbriar Dr, Stafford, Texas 77477
Tel No. 1-800-8385070
Monday - Friday 8:30 AM to 5:30 PM

191 SERIES LED FLOOD LIGHTS



Product Features:


- Corrosion resistant cold forged aluminum construction.
- Trunnion Mounting.
- IP66 protection class
- 110° beam angle
- High efficacy : 150lm/W
- 30-240W optional
- Operating temperature: -30°C ~ 45°C
- UL,cUL,DLC5.1,SAA certificate

Suitable Applications:

- Shopping mall
- Exhibition center
- Parks Car
- parking area
- Stadium
- Gymnasium
- Billboard
- School
- Other places need lighting product




Dimensions

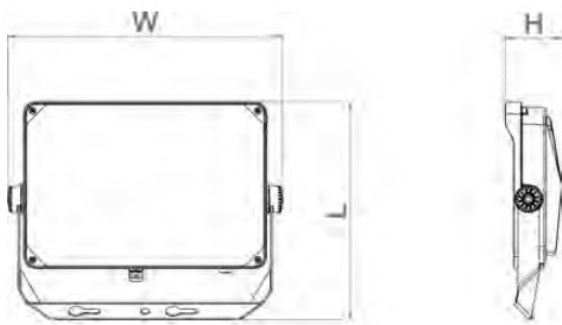

Turnnion Mount	L x W x H (mm)
100W	299.0x350.0x71.0
150W	335.0x394.0x82.0
200-240W	400.0x474.0x100.0

Turnnion Mount

Photometrics

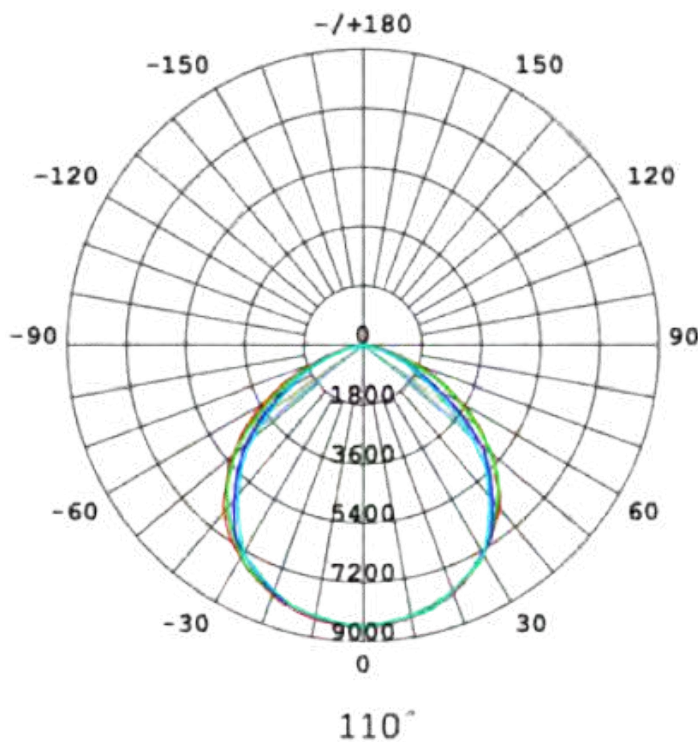

Ordering Guide

Example: 191C2-100W-T+192-SLIP

PRODUCT TYPE	PRODUCT NAME	CCT FIXED	INPUT VOLTAGE	WATTAGE FIXED	BRACKET	PHOTOCELL	ADD ON
FLOOD LIGHT	191	C= 5000K	2 = 120-277V	100W 150W 200W 240W	T = TRUNNION	NA	191-SLIP = SLIPFITTER

Safety Precaution

- Safety Precaution To reduce the risk of death, personal injury, or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards read all warnings and instructions included with and on the fixture box and all fixture labels.
- Before installing, servicing, or performing routine maintenance on this equipment, follow these general precautions.
- Commercial installation, service, and maintenance of luminaires should be performed by a qualified licensed electrician.
- For The installation: If you are unsure about the installation or maintenance of the luminaires, consult a qualified licensed electrician and check your local electrical code.
- To prevent wiring damage or abrasion, do not expose wiring to the edges of sheet metal or other sharp objects.
- Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.

WARNING: RISK OF FIRE OR ELECTRICAL SHOCK

- Turn off electrical power at fuse or circuit breaker box before wiring the fixture to the power supply.
- Turn off the power when you perform any maintenance. Verify that the supply voltage is correct by comparing it with the luminaire label information.
- Make all electrical and grounded connections in accordance with the National Electrical Code and any applicable local code requirements.
- All wiring connections should be capped with UL approved wire connectors.

CAUTION: RISK OF INJURY

- Avoid direct eye exposure to the light source while it is on.
- Account for small parts and destroy packing material, as these may be hazardous to children.

DVDLIGHTS - INDUSTRIAL & COMMERCIAL LED LIGHTING COMPANY - 191 SERIES LED FLOOD LIGHTS