
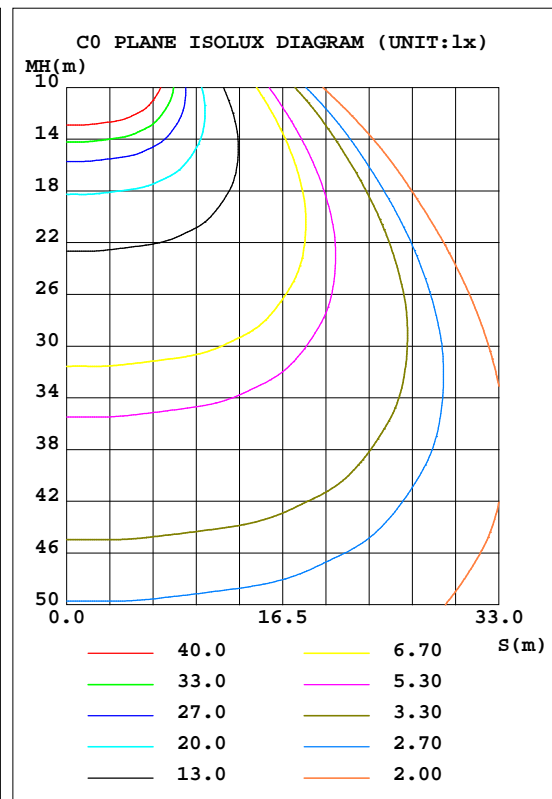


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.6V I:1.162A P:137.9W PF:0.9921 Freq:59.98Hz Lamp Flux:20825.9x1 lm		
NAME:	TYPE:120° 20C18B	WEIGHT:
SPEC.:5000K 70Ra	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 151.01 lm/W			
MODEL		I _{max} (cd)	7647	S/MH(C0/180)	1.54
NOMINAL POWER(W)	150	LOR(%)	100.0	S/MH(C90/270)	1.55
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	20826	η UP, DN(C0-180)	0.1,50.4
NOMINAL FLUX(lm)	20825.9	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.3,49.2
LAMPS INSIDE	1	η up(%)	0.4	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)	120	η down(%)	99.6	CIBSE SHR MAX	1.55

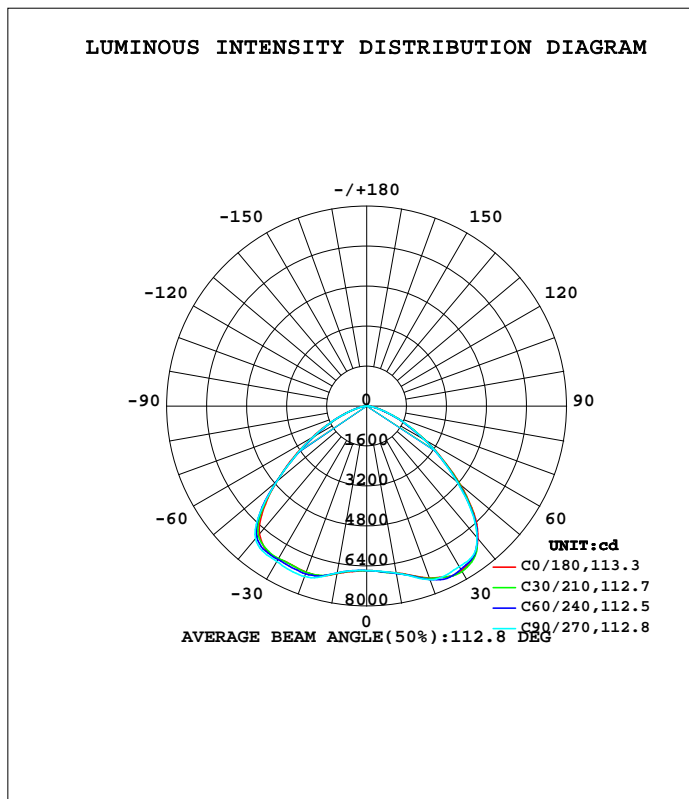

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2019-11-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:13.130m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	6776	6796	6785	6787	6803	6781	6776	6780	0- 10	638.2	638.2	3.06,3.06
20	7322	7362	7390	7221	7076	7113	7258	7385	10- 20	2003	2641	12.7,12.7
30	7598	7594	7413	7194	7064	7070	7187	7419	20- 30	3389	6030	29,29
40	6923	6884	6869	6826	6676	6799	6924	6941	30- 40	4509	10539	50.6,50.6
50	4900	4801	4729	4726	4700	4723	4704	4752	40- 50	4566	15105	72.5,72.5
60	2672	2654	2627	2571	2524	2424	2479	2515	50- 60	3214	18319	88,88
70	1105	1103	1105	1091	1012	976.0	978.3	1024	60- 70	1719	20038	96.2,96.2
80	269.8	262.6	255.4	234.5	204.2	198.9	211.8	237.0	70- 80	610.5	20649	99.2,99.2
90	0.0084	0.0072	0	0.0165	3.974	3.959	3.939	3.872	80- 90	92.10	20741	99.6,99.6
100	0.0440	0.0230	0.0123	0.0233	9.059	8.938	8.844	8.776	90-100	3.394	20744	99.6,99.6
110	1.821	1.767	1.710	1.766	15.48	15.28	15.13	15.03	100-110	6.774	20751	99.6,99.6
120	4.555	4.515	4.416	4.501	20.91	20.79	20.57	20.18	110-120	10.44	20762	99.7,99.7
130	8.435	8.443	8.423	8.530	24.51	24.37	24.16	23.70	120-130	12.91	20775	99.8,99.8
140	13.46	13.39	13.43	13.59	26.88	26.70	26.59	26.30	130-140	14.02	20789	99.8,99.8
150	19.58	19.43	19.49	19.60	28.97	28.83	28.65	28.39	140-150	13.77	20802	99.9,99.9
160	26.21	26.20	26.21	26.29	30.82	30.63	30.40	30.19	150-160	12.11	20814	99.9,99.9
170	30.38	30.36	30.49	30.63	31.73	31.53	31.47	31.55	160-170	8.431	20823	100,100
180	31.27	31.15	31.34	31.56	31.41	31.13	31.21	31.60	170-180	2.983	20826	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 12933 lm

%lum = 62.1%
%lamp = 62.1%

Conical surface Flux(120deg): 18319 lm


%lum = 88.0%
%lamp = 88.0%

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2019-11-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:13.130m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.6V I:1.162A P:137.9W PF:0.9921 Freq:59.98Hz Lamp Flux:20825.9x1 lm		
NAME:	TYPE:120° 20C18B	WEIGHT:
SPEC.:5000K 70Ra	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

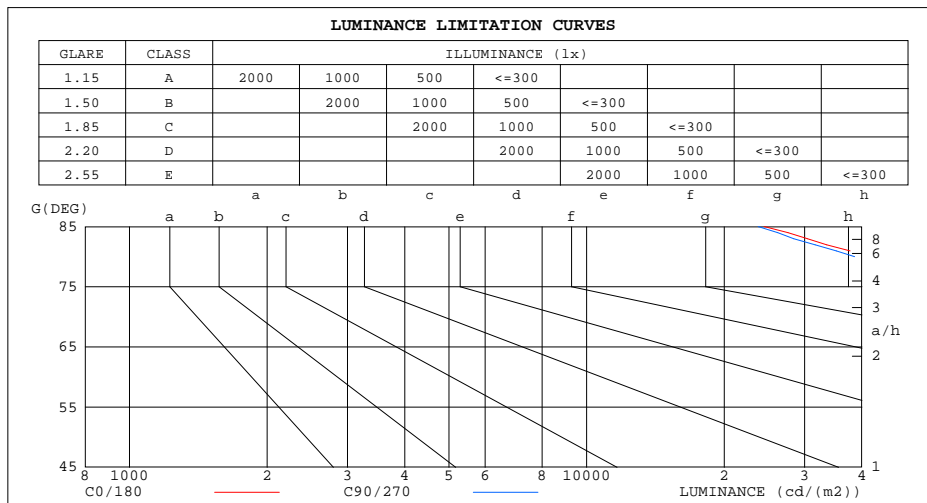


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2019-11-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:13.130m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.6V I:1.162A P:137.9W PF:0.9921 Freq:59.98Hz Lamp Flux:20825.9x1 lm		
NAME:	TYPE:120° 20C18B	WEIGHT:
SPEC.:5000K 70Ra	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.06	1.02	.99	1.04	1.00	.97	.90	.97	.94	.96	.93	.91	.92	.90	.89	.87
2.0	.94	.88	.83	.92	.86	.82	.88	.84	.80	.85	.81	.78	.82	.79	.76	.74
3.0	.83	.76	.70	.82	.75	.69	.79	.73	.68	.76	.71	.67	.73	.69	.65	.63
4.0	.74	.66	.60	.73	.65	.59	.70	.64	.58	.68	.62	.58	.66	.61	.57	.55
5.0	.66	.58	.52	.65	.57	.51	.63	.56	.51	.61	.55	.50	.59	.54	.50	.48
6.0	.60	.51	.45	.59	.51	.45	.57	.50	.44	.55	.49	.44	.54	.48	.44	.42
7.0	.54	.46	.40	.53	.45	.40	.52	.45	.39	.50	.44	.39	.49	.43	.39	.37
8.0	.49	.41	.35	.49	.41	.35	.47	.40	.35	.46	.40	.35	.45	.39	.35	.33
9.0	.45	.37	.32	.45	.37	.32	.43	.36	.31	.42	.36	.31	.41	.35	.31	.29
10.0	.42	.34	.29	.41	.34	.29	.40	.33	.28	.39	.33	.28	.38	.32	.28	.26

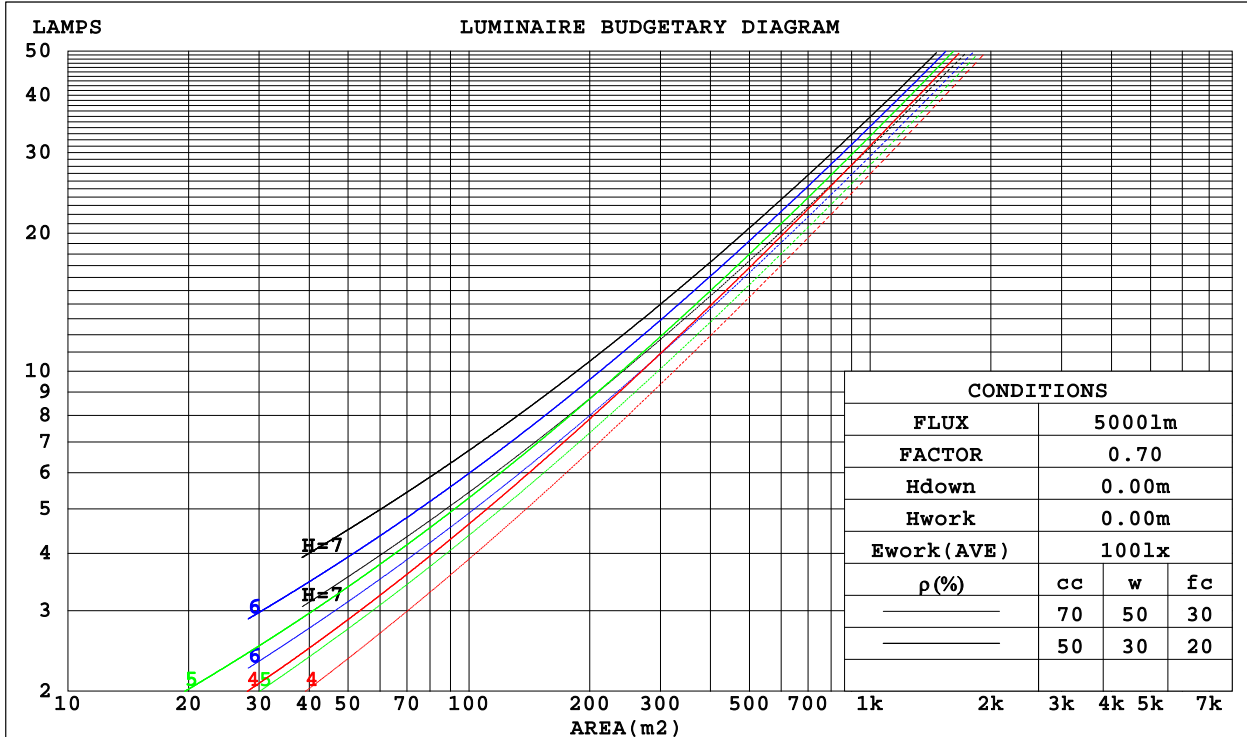

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2019-11-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:13.130m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.6V I:1.162A P:137.9W PF:0.9921 Freq:59.98Hz Lamp Flux:20825.9x1 lm		
NAME:	TYPE:120° 20C18B	WEIGHT:
SPEC.:5000K 70Ra	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.265	.151	.048	.258	.147	.047	.245	.141	.045	.233	.134	.043	.222	.128	.041	
2.0	.259	.142	.043	.252	.139	.043	.241	.134	.042	.230	.129	.040	.220	.125	.039	
3.0	.245	.130	.039	.240	.128	.039	.229	.124	.038	.220	.121	.037	.211	.117	.036	
4.0	.230	.120	.035	.226	.118	.035	.217	.115	.034	.208	.112	.034	.200	.109	.033	
5.0	.216	.110	.032	.212	.109	.032	.204	.106	.031	.196	.104	.031	.189	.101	.030	
6.0	.203	.102	.029	.199	.100	.029	.192	.098	.029	.185	.096	.028	.179	.094	.028	
7.0	.190	.094	.027	.187	.093	.027	.181	.091	.026	.174	.089	.026	.169	.088	.026	
8.0	.179	.088	.025	.176	.087	.025	.170	.085	.024	.165	.083	.024	.160	.082	.024	
9.0	.169	.082	.023	.166	.081	.023	.161	.080	.023	.156	.078	.022	.151	.077	.022	
10.0	.160	.076	.021	.157	.076	.021	.152	.075	.021	.148	.073	.021	.144	.072	.021	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.194	.194	.194	.165	.165	.165	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.180	.160	.141	.154	.137	.121	.106	.094	.084	.061	.055	.049	.019	.018	.016	
2.0	.171	.135	.105	.146	.116	.091	.100	.081	.063	.058	.047	.037	.019	.015	.012	
3.0	.163	.117	.081	.140	.101	.070	.096	.070	.049	.055	.041	.029	.018	.013	.010	
4.0	.155	.104	.064	.133	.090	.056	.092	.062	.039	.053	.037	.023	.017	.012	.008	
5.0	.148	.093	.052	.127	.081	.046	.088	.056	.032	.051	.033	.019	.016	.011	.006	
6.0	.142	.085	.044	.122	.073	.038	.084	.051	.027	.049	.030	.016	.016	.010	.005	
7.0	.135	.078	.038	.117	.068	.033	.081	.047	.023	.047	.028	.014	.015	.009	.005	
8.0	.129	.072	.033	.111	.063	.029	.077	.044	.020	.045	.026	.012	.015	.008	.004	
9.0	.124	.067	.029	.107	.058	.025	.074	.041	.018	.043	.024	.011	.014	.008	.004	
10.0	.118	.063	.026	.102	.055	.023	.071	.038	.016	.041	.023	.010	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2019-11-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:13.130m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.6V I:1.162A P:137.9W PF:0.9921 Freq:59.98Hz Lamp Flux:20825.9x1 lm										
NAME:					TYPE:120° 20C18B			WEIGHT:		
SPEC.:5000K 70Ra					DIM.:			SERIAL No.:		
MFR.:					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	20.2	21.6	20.4	21.8	22.0	20.0	21.4	20.3	21.6	21.9
3H	20.7	22.0	21.0	22.3	22.5	20.6	21.9	20.9	22.1	22.4
4H	20.8	22.1	21.2	22.3	22.6	20.7	21.9	21.0	22.2	22.4
6H	20.9	22.0	21.2	22.3	22.6	20.7	21.9	21.0	22.1	22.4
8H	20.8	21.9	21.2	22.2	22.5	20.7	21.8	21.0	22.1	22.4
12H	20.8	21.9	21.1	22.2	22.5	20.6	21.7	21.0	22.0	22.3
4H 2H	20.4	21.7	20.7	21.9	22.2	20.3	21.5	20.6	21.8	22.0
3H	21.1	22.2	21.5	22.5	22.8	21.0	22.0	21.3	22.3	22.7
4H	21.3	22.3	21.7	22.6	22.9	21.2	22.1	21.5	22.4	22.8
6H	21.4	22.2	21.8	22.6	22.9	21.2	22.1	21.6	22.4	22.8
8H	21.3	22.1	21.8	22.5	22.9	21.2	22.0	21.6	22.4	22.7
12H	21.3	22.0	21.8	22.4	22.8	21.2	21.9	21.6	22.3	22.7
8H 4H	21.3	22.1	21.7	22.5	22.8	21.2	22.0	21.6	22.3	22.7
6H	21.4	22.1	21.8	22.5	22.9	21.3	21.9	21.7	22.3	22.8
8H	21.4	22.0	21.9	22.4	22.9	21.3	21.8	21.7	22.3	22.7
12H	21.4	21.9	21.9	22.4	22.8	21.3	21.8	21.8	22.2	22.7
12H 4H	21.3	22.0	21.7	22.4	22.8	21.1	21.9	21.6	22.2	22.6
6H	21.4	22.0	21.8	22.4	22.8	21.2	21.8	21.7	22.2	22.7
8H	21.4	21.9	21.9	22.3	22.8	21.3	21.7	21.7	22.2	22.7
Variations with the observer position at spacings:										
S = 1.0H	+ 0.5 / - 0.6					+ 0.5 / - 0.6				
1.5H	+ 0.3 / - 0.5					+ 0.3 / - 0.4				
2.0H	+ 1.0 / - 1.2					+ 1.0 / - 1.2				

CIE Pub.117, 20826 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 10.5)

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2019-11-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:13.130m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.6V I:1.162A P:137.9W PF:0.9921 Freq:59.98Hz Lamp Flux:20825.9x1 lm		
NAME:	TYPE:120° 20C18B	WEIGHT:
SPEC.:5000K 70Ra	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	60	49	43	60	49	42	58	49	42	36
0.80	71	60	53	70	60	53	68	59	53	46
1.00	80	70	63	79	69	63	77	70	62	56
1.25	87	78	71	86	77	71	83	76	70	63
1.50	92	83	77	90	82	76	87	81	75	68
2.00	98	91	85	97	90	85	93	88	83	76
2.50	102	95	90	100	94	89	96	91	87	79
3.00	105	99	94	103	97	93	99	94	91	83
4.00	108	103	99	106	101	98	102	98	95	87
5.00	110	106	102	108	104	101	103	100	98	89
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2019-11-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:13.130m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.6V I:1.162A P:137.9W PF:0.9921 Freq:59.98Hz Lamp Flux:20825.9x1 lm		
NAME:	TYPE:120° 20C18B	WEIGHT:
SPEC.:5000K 70Ra	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

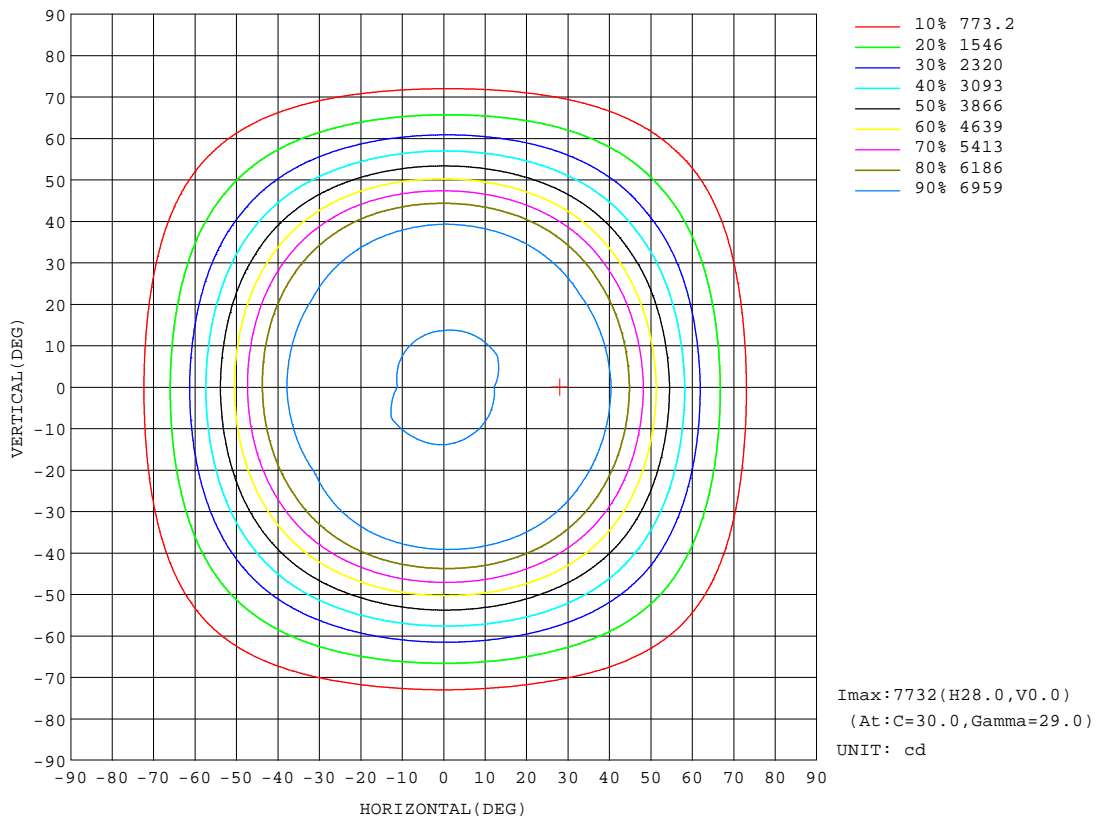


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2019-11-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:13.130m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.6V I:1.162A P:137.9W PF:0.9921 Freq:59.98Hz Lamp Flux:20825.9x1 lm		
NAME:	TYPE:120° 20C18B	WEIGHT:
SPEC.:5000K 70Ra	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Flux out:17519 lm

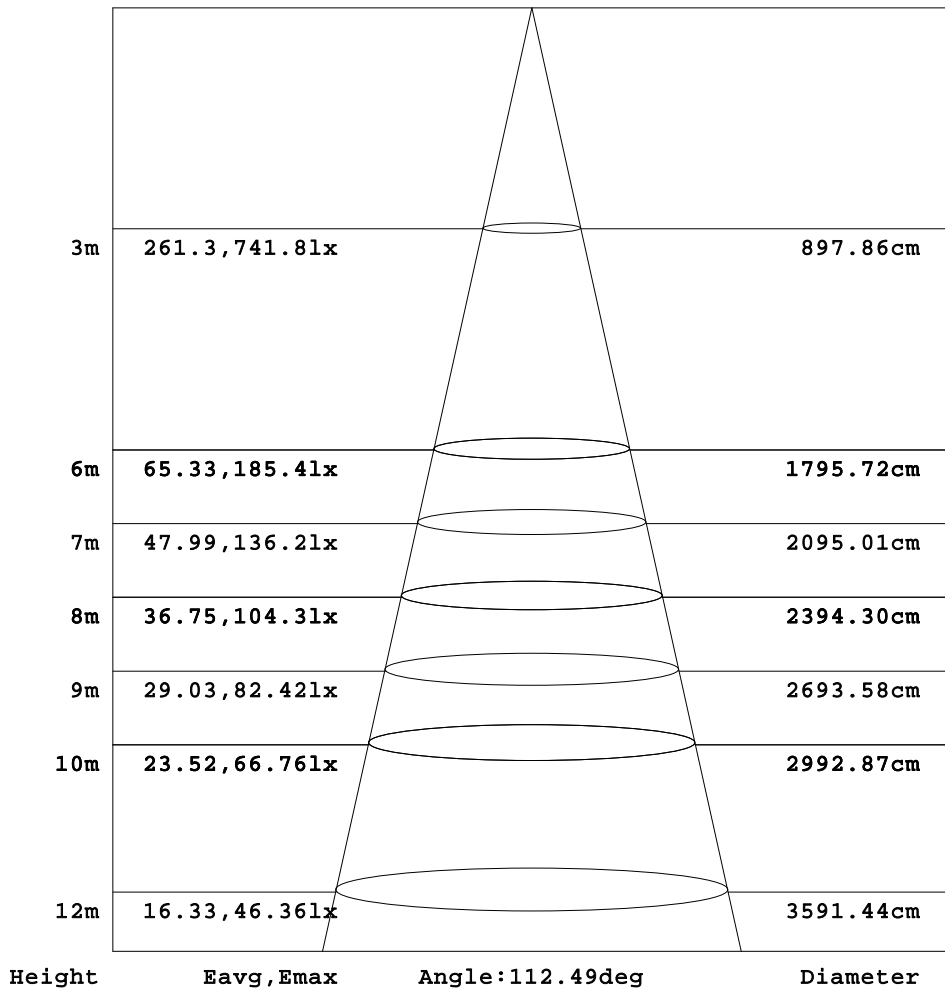


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2019-11-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:13.130m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.6V I:1.162A P:137.9W PF:0.9921 Freq:59.98Hz Lamp Flux:20825.9x1 lm		
NAME:	TYPE:120° 20C18B	WEIGHT:
SPEC.:5000K 70Ra	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

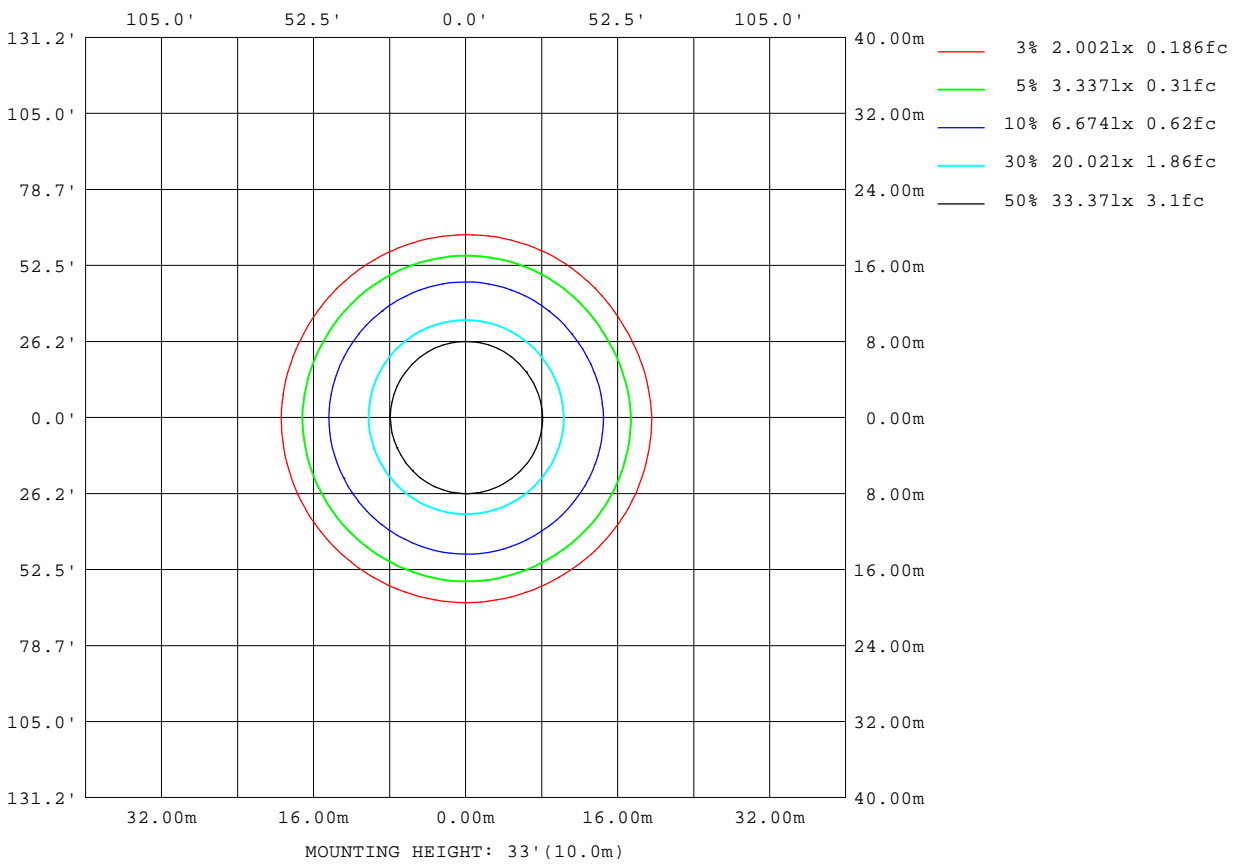

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2019-11-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:13.130m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.6V I:1.162A P:137.9W PF:0.9921 Freq:59.98Hz Lamp Flux:20825.9x1 lm		
NAME:	TYPE:120° 20C18B	WEIGHT:
SPEC.:5000K 70Ra	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	106935
L_0~180(75)av	55728
L_0~180(85)av	21838
L_90~270(65)av	106909
L_90~270(75)av	55989
L_90~270(85)av	21095
L_45(65)av	106630
L_45(75)av	55364
L_45(85)av	21724

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2019-11-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:13.130m [K=1.0000]
Remarks:

Planar Illuminance Curve

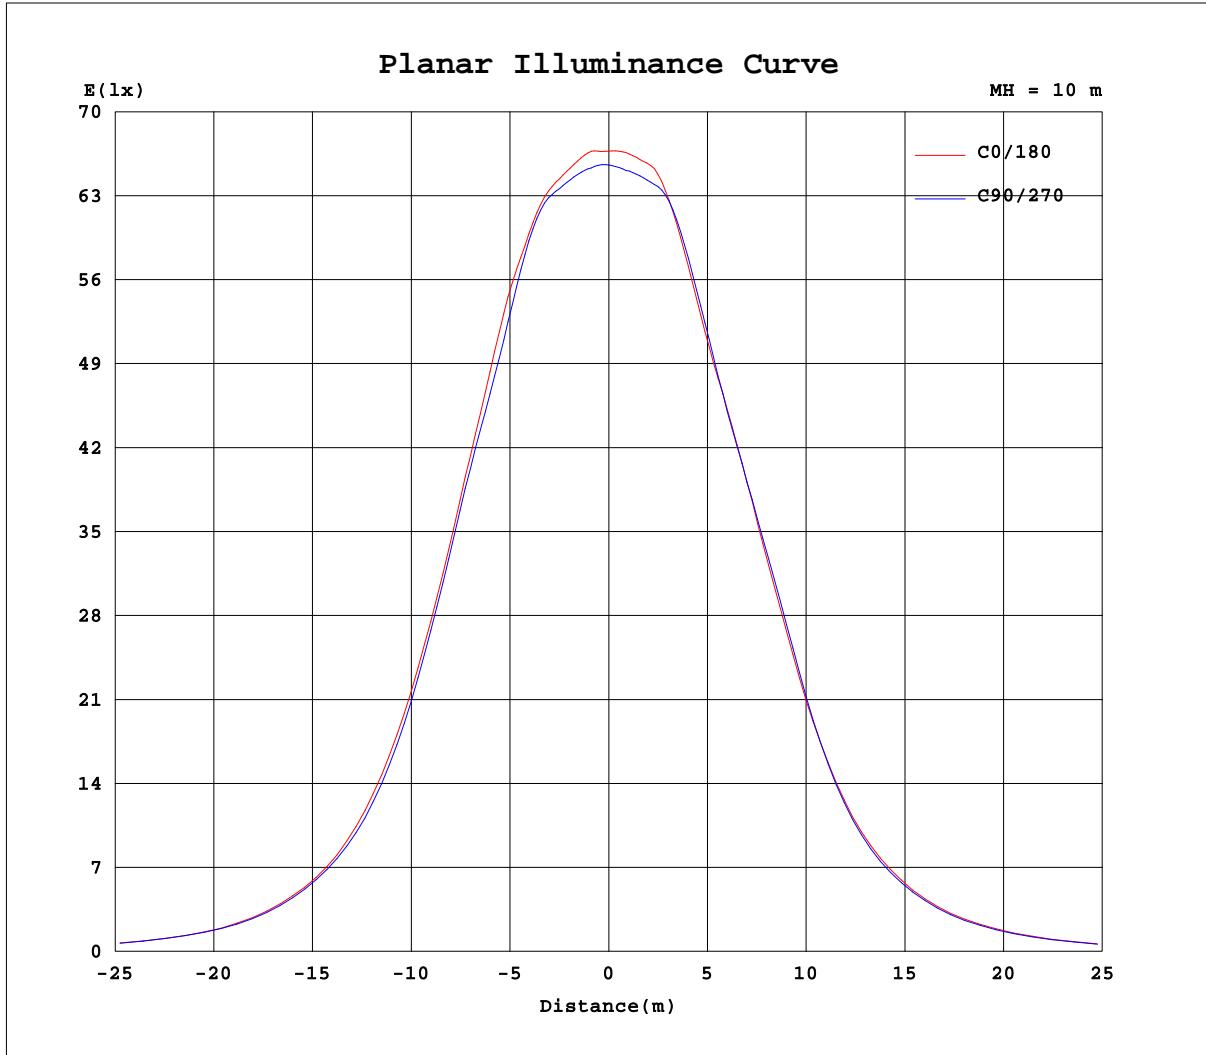

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2019-11-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity: 65.0%
 Test Distance: 13.130m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.6V I:1.162A P:137.9W PF:0.9921 Freq:59.98Hz Lamp Flux:20825.9x1 lm		
NAME:	TYPE:120° 20C18B	WEIGHT:
SPEC.:5000K 70Ra	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	6580	6580	6580	6580	6580	6580	6580	6580	6580	6580	6580	6580						
5	6655	6661	6645	6633	6639	6645	6645	6629	6612	6611	6624	6648						
10	6776	6793	6800	6785	6778	6795	6803	6788	6774	6776	6771	6788						
15	7018	7030	7038	7058	7085	7066	7027	7012	7038	7069	7059	7053						
20	7322	7341	7384	7390	7284	7157	7076	7082	7144	7258	7370	7399						
25	7539	7544	7604	7478	7282	7124	7029	7036	7120	7254	7441	7584						
30	7598	7644	7543	7413	7253	7134	7064	7047	7093	7187	7348	7490						
35	7424	7464	7406	7360	7256	7147	7025	6995	7070	7155	7257	7336						
40	6923	6876	6893	6869	6864	6788	6676	6754	6845	6924	6945	6937						
45	6065	6013	5971	5937	5938	5931	5849	5946	6045	6040	6074	6091						
50	4900	4848	4755	4729	4705	4748	4700	4713	4732	4704	4731	4773						
55	3700	3668	3615	3641	3597	3608	3571	3490	3476	3511	3522	3548						
60	2672	2684	2624	2627	2572	2570	2524	2418	2430	2479	2521	2509						
65	1760	1790	1765	1785	1773	1759	1675	1606	1620	1649	1702	1688						
70	1105	1115	1091	1105	1102	1079	1012	977	975	978	1019	1028						
75	592	592	583	594	574	556	504	480	494	507	538	543						
80	270	268	257	255	241	228	204	193	204	212	231	243						
85	80.0	83.9	78.7	78.9	75.1	74.8	64.6	61.2	62.9	60.9	66.4	71.9						
90	0.01	0.00	0.01	0.00	0.03	0.00	3.97	4.01	3.91	3.94	3.89	3.85						
95	0.00	0.00	0.00	0.00	0.00	0.00	6.22	6.22	6.11	6.12	6.08	6.03						
100	0.04	0.05	0.00	0.01	0.00	0.05	9.06	9.02	8.86	8.84	8.78	8.77						
105	0.82	0.81	0.72	0.73	0.74	0.78	12.2	12.1	12.0	12.0	11.9	11.9						
110	1.82	1.79	1.74	1.71	1.77	1.76	15.5	15.3	15.2	15.1	15.1	15.0						
115	3.06	3.02	2.99	2.90	3.00	2.97	18.4	18.3	18.2	18.1	18.0	17.8						
120	4.56	4.56	4.47	4.42	4.51	4.49	20.9	20.9	20.7	20.6	20.3	20.0						
125	6.33	6.33	6.30	6.26	6.36	6.38	22.9	22.9	22.8	22.5	22.3	21.9						
130	8.44	8.46	8.42	8.42	8.52	8.54	24.5	24.4	24.3	24.2	23.9	23.5						
135	10.8	10.8	10.8	10.8	11.0	10.9	25.8	25.7	25.6	25.5	25.3	24.9						
140	13.5	13.4	13.4	13.4	13.6	13.6	26.9	26.8	26.6	26.6	26.4	26.2						
145	16.4	16.3	16.2	16.3	16.5	16.5	27.9	27.8	27.6	27.6	27.5	27.2						
150	19.6	19.4	19.4	19.5	19.6	19.6	29.0	28.9	28.7	28.6	28.5	28.3						
155	23.0	22.9	22.9	22.9	23.0	23.0	30.0	30.0	29.8	29.7	29.5	29.3						
160	26.2	26.2	26.2	26.2	26.3	26.3	30.8	30.7	30.5	30.4	30.3	30.1						
165	28.7	28.8	28.8	28.9	28.9	29.0	31.4	31.3	31.2	31.0	31.0	30.8						
170	30.4	30.4	30.3	30.5	30.6	30.7	31.7	31.5	31.5	31.5	31.6	31.5						
175	31.0	31.0	30.9	31.1	31.2	31.4	31.7	31.4	31.4	31.4	31.8	31.7						
180	31.3	31.2	31.1	31.3	31.4	31.7	31.4	31.1	31.2	31.2	31.6	31.6						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2019-11-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:13.130m [K=1.0000]
 Remarks: