



Industrial & Commercial LED Lighting Company

4403 Greenbriar Dr, Stafford, Texas 77477  
Tel No. 1-800-8385070  
Monday - Friday 8:30 AM to 5:30 PM

## 400C SERIES LED LINEAR HIGH BAYS



### Introduction:

- The 400C Series LED Linear High Bay, is a super compact design using die-cast housing, with a clean and integral structure.
- Making it save a lot of shipping costs and easier to install.
- Standard 6,10KV surge protection, making it steadily running under poor power conditions.
- It delivers up to 150 lumens per watt for efficiency and the highest lumen output reaches to 63,840lm.
- The whole family with two different sizes.
- Moon sensor and remote controller are available.
- Also emergency battery backup is optional.
- It is widely used for warehouse and storage, industrial facilities, sports facilities, gyms, etc

### Product Features:

- It's a die-cast aluminum housing.
- Powder coat corrosion resistant finish, with High Transmittance polycarbonate lens.

### Electrical:

- 0-10V dimmable driver, which can dim from 100% down to off.
- Input voltage 120-277V/277-480V for US market, 120-347V for Canada market, and 50/60Hz.
- Designed to withstand up to L/N-PE:10kV,L-N:6kV surge(120-277V/120-347V/277-480V).

### Optics:


- High quality polycarbonate lens protects LEDs. UGR <28 meet DLC premium.

### Ambient Temperature:


- -40° F (-40° C) to 122° F (50° C)

### Listing:

- UL listed, meet U.S. and Canadian standards.
- Suitable for dry locations.
- DesignLights Consortium<sup>®</sup>(DLC)Premium qualified.


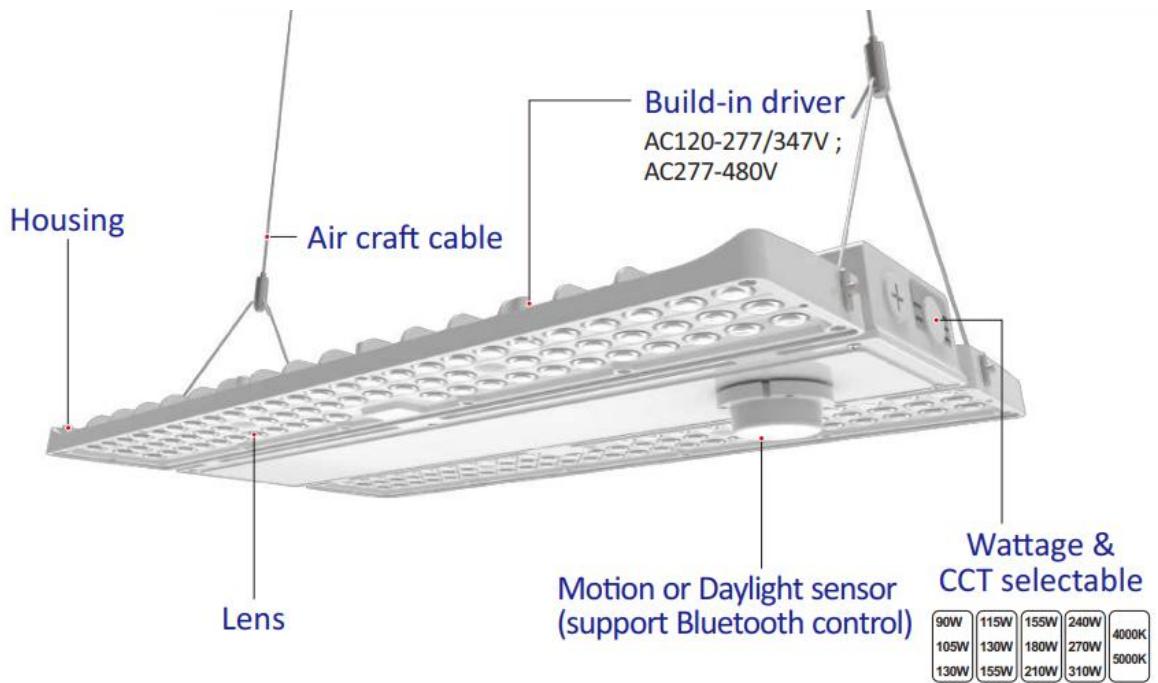


Accessories

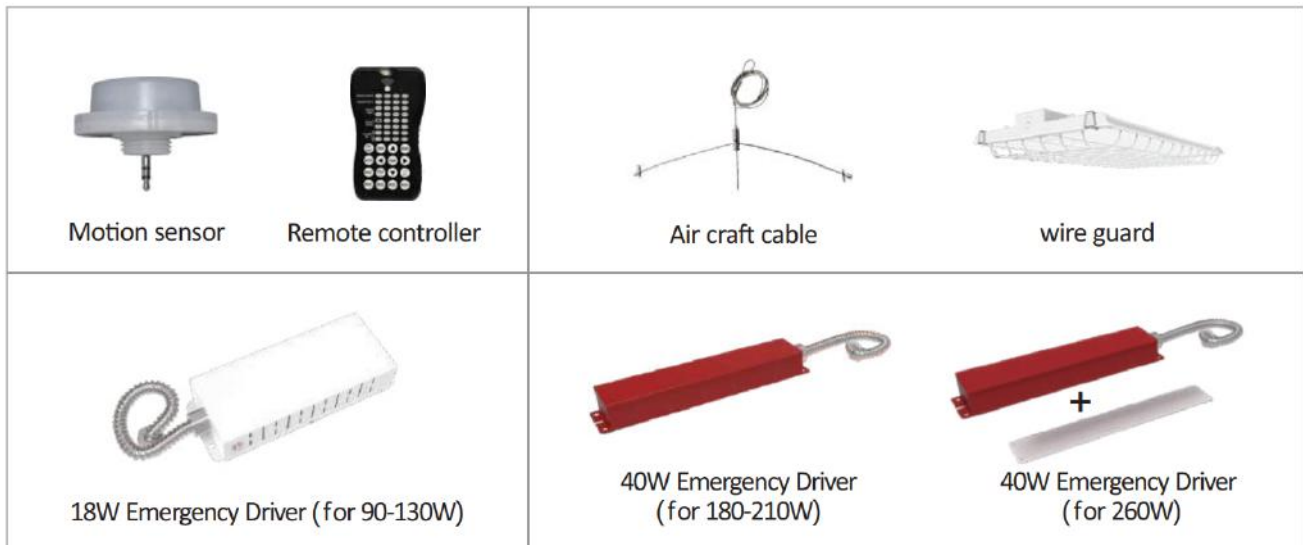



Dimensions & Weight

90W/ 130W Normal





Net Weight: 2.5kgs/5.5Lbs

With Sensor







Net Weight: 2.5kgs/5.5Lbs

With Emergency Driver




Net Weight: 3.6kgs/7.9Lbs


**130W/ 210W**



Net Weight: 3.3kgs/7.3Lbs







Net Weight: 3.3kgs/7.3Lbs




Net Weight: 4.6kgs/10.1Lbs


**180/260W**

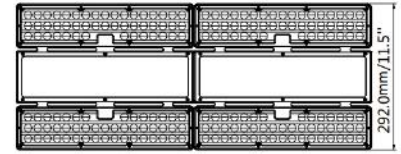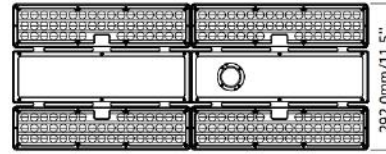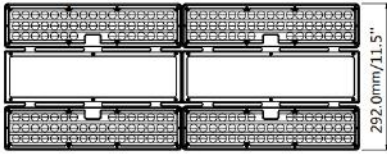

Net Weight: 5.2kgs/11.5Lbs






Net Weight: 5.2kgs/11.5Lbs




Net Weight: 6.8kgs/15.0Lbs

**260W/420W**

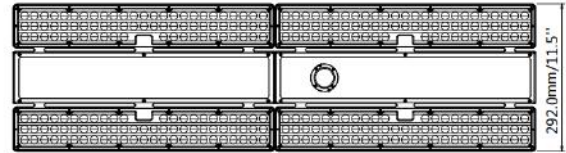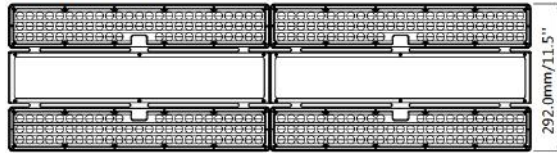


Net Weight: 6.8kgs/15.0Lbs



Net Weight: 6.8kgs/15.0Lbs

**Photometrics**

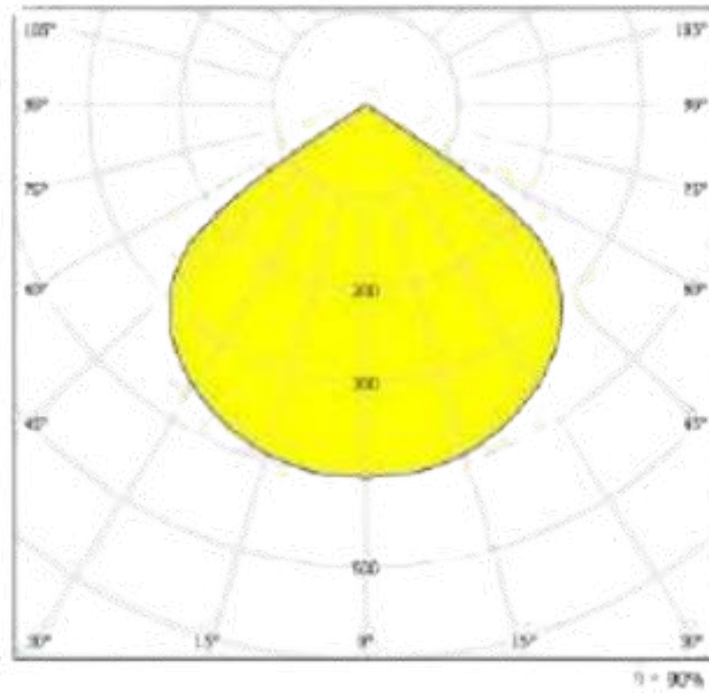

Ordering Guide

**Example: 400C2-130W-1.2FT+400-WIREGUARD-S**

PRODUCT TYPE	PRODUCT NAME	CCT	INPUT VOLTAGE	WATTAGE SELECTABLE	SIZE	ADD ON
LINEAR HIGHBAY	400	X= 4000/5000K	2 = 120-277V	130W = (90/105/130W) 155W = (115/130/155W) 210W = (130/180/210W) 310W = (240/270/310W)	1.2FT 1.2FT 1.2FT 1.7FT	400-WIREGUARD-S = FITS 130W & 155W 400-WIREGUARD-L = ***** 400-SENSOR = OCCUPANCY SENSOR 400-REMOTE = SENSOR REMOTE *****
		X= 4000/5000K	7=277-480V	310W = (240/270/310W)	1.7FT	400-SPLICE = CONNECT FIXTURES *****
		C = 5000K	2 = 120-277V	130W = (90/105/130W) 210W = (130/180/210W)	1.2FT 1.2FT	400C2-BATTERY-25W = BATTERY BACK UP 400C2-BATTERY-40W = BATTERY BACK UP ***** 400-SURFACEM = SURFACE MOUNT BRACKET