



Industrial & Commercial LED Lighting Company

4403 Greenbriar Dr, Stafford, Texas 77477
Tel No. 1-800-8385070
Monday - Friday 8:30 AM to 5:30 PM

805 SERIES LED VAPOR TIGHT




Product Features:


- IP66 waterproof, dust, corrosion and pressure-proof
- Microwave sensor and Emergency backup option
- High Impact PC Housing (Ik08)
- 5VA flame class and work outside directly
- New Design- new structure, east to wiring
- New Revolution Wiring and Maintenance
- Easy installation, 20% labor cost saved
- AC120-277V;AC277-480V
- 2FT/ 4FT/ 8FT Length optional
- cETLus/DLC cerficaon,130lm/w
- Operating temperature: -20°C~45°C

Suitable Application:

- Industrial
- Warehouse
- Garages
- Workshops
- Commercial

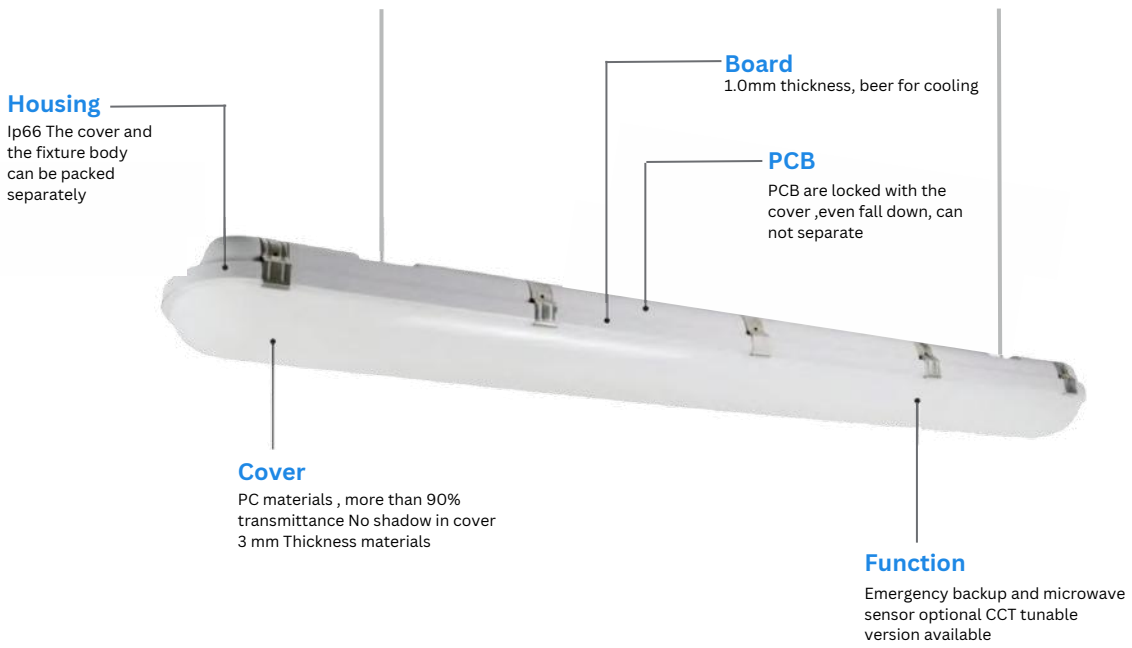

Dimensions & Weight

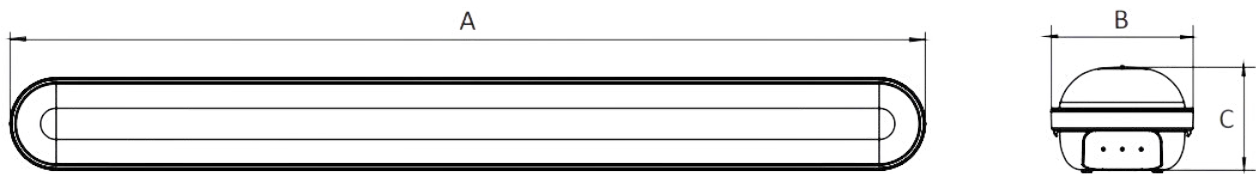

Length \ Size	A	B	C
2FT	23.62''	4.76''	3.50''
4FT	47.24''	4.76''	3.50''
8FT	94.49''	6.30''	4.09''

Accessories



Suspending Wirerope



Microwave Sensor




Emergency Backup


Installation

NOTE: Always Turn Off the Power Supply from Main Circuit Breaker First.

Suspension installation

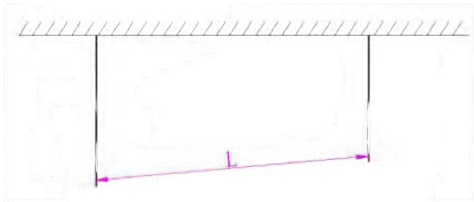

Mounted the wire rope suspend kit to the ceiling

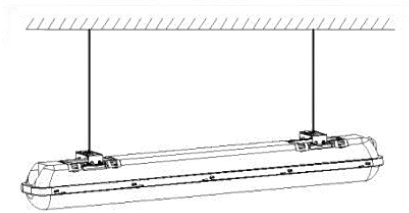

Mounted the clips to the rope suspend kit by screw, recommend the distance between the chain : 382mm-0.6m; 982mm-1.2m; 1282mm-1.5m

Ceiling mount installation



Fasten the clips to the mounting surface with the expansion screw. The distance between the clips: 382mm-0.6m; 982mm-1.2m; 1282mm-1.5m



Secure the fixture to the mouted clips



Fasten the mounting clips to the ceiling with expansion screw, then connect the lights with a cable and fix the lights to the clips


Ordering Guide

Example: 805C2-40W-4FT

PRODUCT TYPE	PRODUCT NAME	CCT FIXED	INPUT VOLTAGE	WATTAGE FIXED	SIZE
VAPOR TIGHT LIGHT	805	C= 5000K	2 = 120-277V	40W	4FT

Packaging Details

Model	Carton Dimension	Qty / Carton	N.W	G.W	20GP	40HQ
2FT	26.77''*10.83''*8.27''	4PCS	15.88lbs	16.9lbs	2460pcs	6768pcs
	26.77''*21.06''*8.27''	8PCS	31.74lbs	33lbs	2520pcs	6944pcs
4FT	50.39''*10.83''*8.27''	4PCS	26.45bs	28.22lbs	1296pcs	3564pcs
	50.39''*21.06''*8.27''	8PCS	52.9lbs	54.67lbs	1328pcs	3664pcs

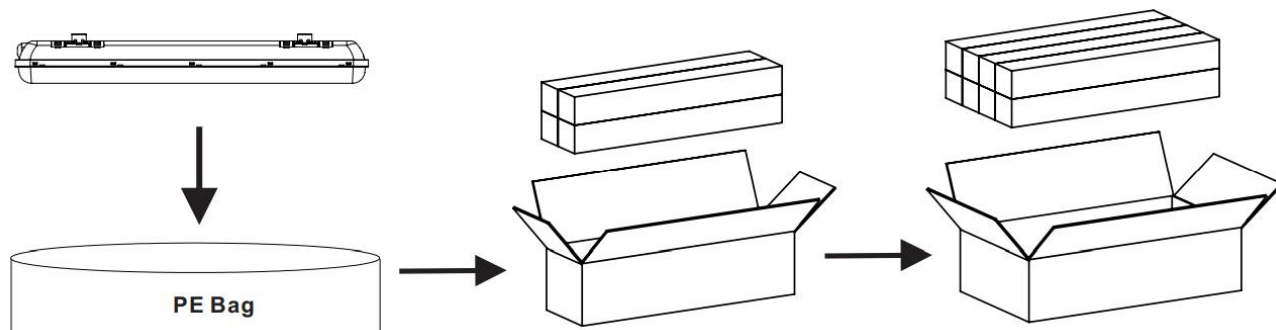

Safety Precautions

- To reduce the risk of death, personal injury, or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards read all warnings and instructions included with and on the fixture box and all fixture labels.
- Before installing, servicing, or performing routine maintenance on this equipment, follow these general precautions.
- Commercial installation, service, and maintenance of luminaires should be performed by a qualified licensed electrician.
- For The installation: If you are unsure about the installation or maintenance of the luminaires, consult a qualified licensed electrician and check your local electrical code.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.

WARNING: RISK OF FIRE OR ELECTRICAL SHOCK

- Turn off electrical power at fuse or circuit breaker box before wiring the fixture to the power supply.
- Turn off the power when you perform any maintenance.
- Verify that the supply voltage is correct by comparing it with the luminaire label information.
- Make all electrical and grounded connections in accordance with the National Electrical Code and any applicable local code requirements.
- All wiring connections should be capped with UL approved wire connectors.

CAUTION: RISK OF INJURY

- Avoid direct eye exposure to the light source while it is on.
- Account for small parts and destroy packing material, as these may be hazardous to children.