




SPECIFICATIONS

Features:	Electrical:(Option)	Application
<ul style="list-style-type: none"> Constructed of die-formed heavy gauge cold rolled steel Opal white PVC(PC) overlay diffuser for visual comfort Latch-free perforated centre basket for easier mounting Indirect reflectors are precision formed and contoured to provide soft, low-glare, indirect illumination while maintaining high-efficiency and a wide, uniform light Painted with a lighting grade baked matt enamel, having a high reflectance factor for premium Designed for mounting into T-bar ceiling grids Suitable for T5 T8 and PLL configurations Available in one, two, three lamps model Available in 24 inch and 48 inch Recessed ,T-bar 	<ul style="list-style-type: none"> G13 G5 lampholder from BJB,AAG stucchi or others Terminal block, Quick disconnecter from IDEAL or WAGO ADVANCE,FULHAM, GE, SYLVANIA, UNIVERSAL ballast etc Emergency kits or dimmable ballast, occupancy sensor Linear fluorescent lamp from GE, Philips, Osram etc CE,CB, CSA,UL Cul listed 	<ul style="list-style-type: none"> Canopies Corridors Stairwells Public room Utility Areas

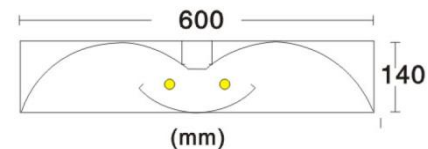

DIMENSIONS

Model	Lamp type	Lamps	Dimension(L*W*H):Inch		
LD-MX892-Y32x3	F32T8	3X32W	47 5/8	23 5/8	5 4/8

NOTE: T8 fluorescent tube US 17W=NON-US 18W, US32W=NON US 36W