



Industrial & Commercial LED Lighting Company

4403 Greenbriar Dr, Stafford, Texas 77477  
Tel No. 1-800-8385070  
Monday - Friday 8:30 AM to 5:30 PM

## 168 SERIES WALL-MOUNT LED LIGHT



### Product Features:

- Sealed die-casting profile for outdoor applications
- Consumes 17W&15W to replace 120W Incandescent, 25W to replace 50W HID
- Lumen output from 1700-2700lm
- Polycarbonate optical lens with UV stabilizers for choosing
- Optional for 120V-277V photocell
- Lifespan: Estimated >50,000 Hours
- UL/cUL wet location listed



### Suitable Applications:

- Perfect for security
- Entry ways
- Stairways
- Storage and perimeter areas, as well as residential exteriors.



## Dimension & Weight


unit: mm/inch

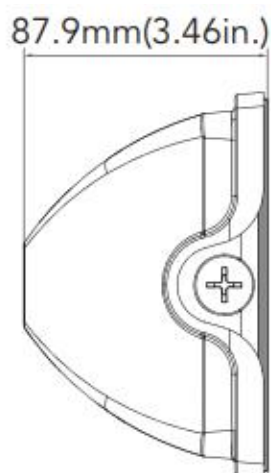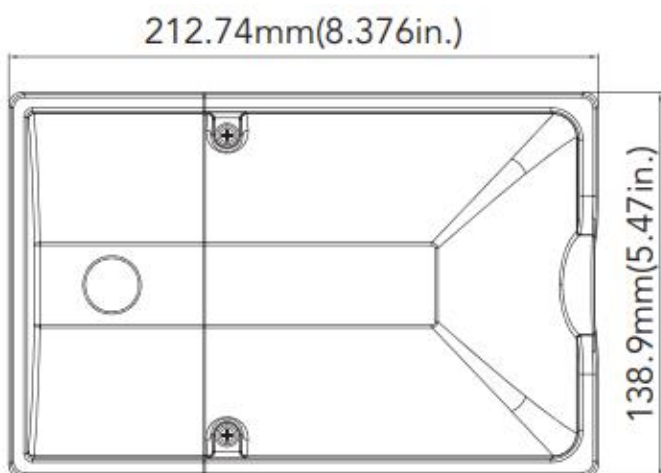


Weight:  
15W/17W: 1.931lb  
25W: 2.015lb

## Photometrics

Clear Lens

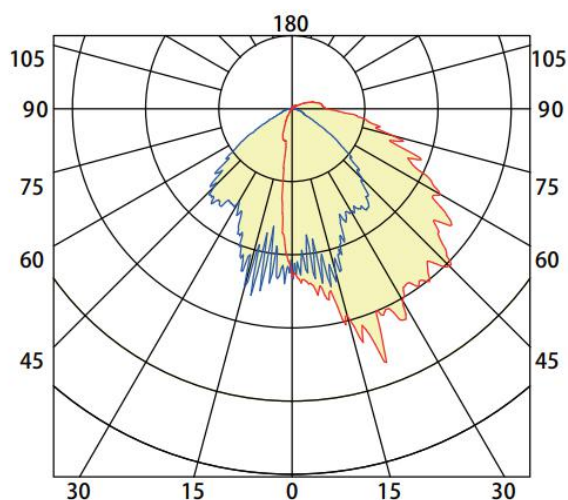

Frosted Lens

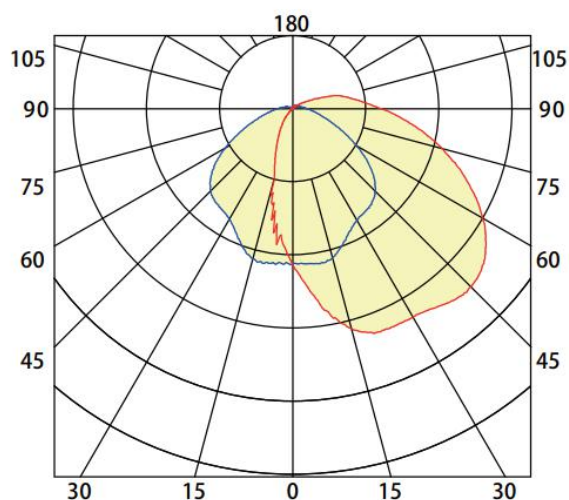

## Application



## Performance Data

| SYSTEM WATTS | VOLTAGE    | LENS         | 4000K(70CRI) |          | 5000K(70CRI) |          |
|--------------|------------|--------------|--------------|----------|--------------|----------|
|              |            |              | LUMENS       | LPW      | LUMENS       | LPW      |
| 15W          | 120-277VAC | Clear Lens   | 1700lm       | 113 lm/W | 1750lm       | 117 lm/W |
|              |            | Frosted Lens | 1800lm       | 120 lm/W | 1820lm       | 121 lm/W |
| 17W          | 120-277VAC | Clear Lens   | 1900lm       | 112 lm/W | 1950lm       | 115 lm/W |
|              |            | Frosted Lens | 2000lm       | 118 lm/W | 2000lm       | 118 lm/W |
| 25W          | 120-277VAC | Clear Lens   | 2550lm       | 102 lm/W | 2600lm       | 104 lm/W |
|              |            | Frosted Lens | 2600lm       | 104 lm/W | 2700lm       | 108 lm/W |

## Electrical Data

| Number Of Drivers | Driver Current (mA) | Nominal Power (W) | INPUT VOLTAGE (V) | CURRENT (Amps) |
|-------------------|---------------------|-------------------|-------------------|----------------|
| 1                 | 250                 | 15                | 120               | 0.13           |
|                   |                     | 15                | 208               | 0.07           |
|                   |                     | 15                | 240               | 0.06           |
|                   |                     | 15                | 277               | 0.05           |
| 1                 | 250                 | 17                | 120               | 0.14           |
|                   |                     | 17                | 208               | 0.08           |
|                   |                     | 17                | 240               | 0.07           |
|                   |                     | 17                | 277               | 0.06           |
| 1                 | 430                 | 25                | 120               | 0.21           |
|                   |                     | 25                | 208               | 0.12           |
|                   |                     | 25                | 240               | 0.10           |
|                   |                     | 25                | 277               | 0.09           |