



Industrial & Commercial LED Lighting Company

4403 Greenbriar Dr, Stafford, Texas 77477
Tel No. 1-800-8385070
Monday - Friday 8:30 AM to 5:30 PM

395 SERIES TRADITIONAL LED WALL PACK



MEDIUM SIZE:
30W / 45W / 70W



LARGE SIZE:
90W / 135W



Product Feature:

- Sealed die-casting profile for indoor and outdoor applications.
- Voltage is 120-277V, 0-10V dimmable.
- Lumen output from 3300-15100lm with efficacy up to 113lm/W.
- Polycarbonate optical lens with UV stabilizers.
- Photocell and Motion Sensor optional and supports Emergency Battery.
- Replacing 100W MH and 400W MH.
- Operating temperature is -40°C to 40°C(-40°F to 104°F).
- UL/cUL wet location and DLC qualified.




Suitable Application:

- Security
- Pathway and perimeter lighting
- Building entryways and walkways






Dimensions & Weight

Medium Size:
unit: mm/inch

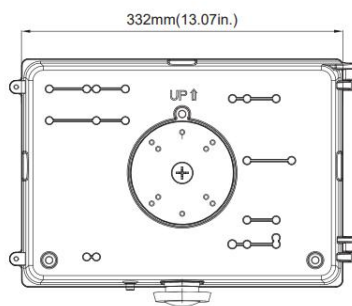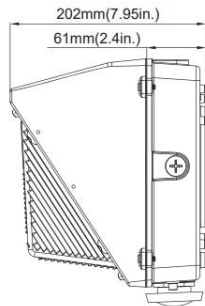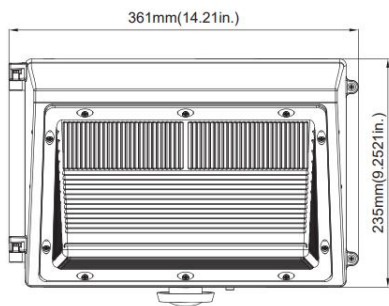

Weight
45W: 7.10lb
70W: 7.39lb


Large Size:
unit: mm/inch

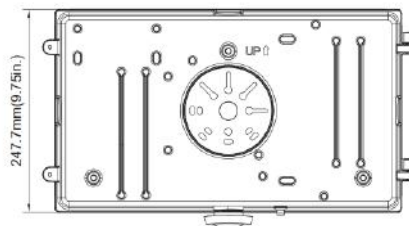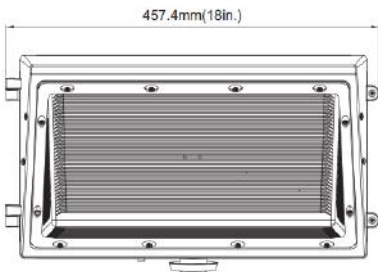


Weight
90W: 10.89lb
135W: 11.62lb

Photometrics

Medium size
Luminous Intensity Distribution Curve

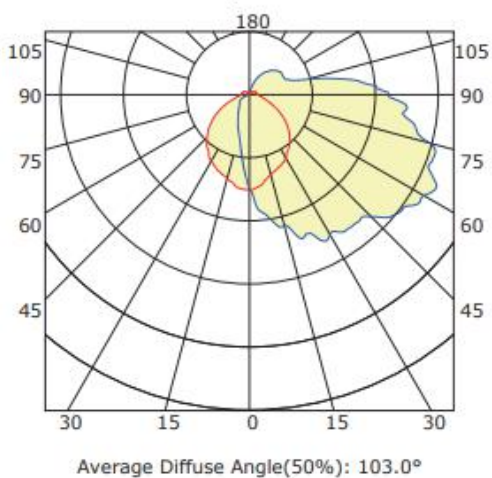

Large size
Luminous Intensity Distribution Curve

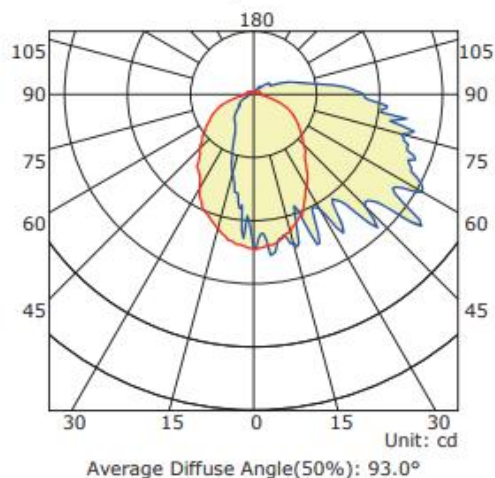

Performance Data

RATED WATTS	VOLTAGE	4000K(70CRI)		5000K(70CRI)	
		LUMENS	LPW	LUMENS	LPW
30W	120-277VAC	3300lm	110 lm/W	3400lm	113 lm/W
45W	120-277VAC	4900lm	109 lm/W	4900lm	109 lm/W
70W	120-277VAC	7800lm	111 lm/W	7800lm	111 lm/W
90W	120-277VAC	9900lm	110 lm/W	9900lm	110 lm/W
135W	120-277VAC	15100lm	112 lm/W	15100lm	112 lm/W

Electrical Data

Number Of Drivers	Driver Current (mA)	Nominal Power (W)	INPUT VOLTAGE (V)	CURRENT (Amps)
1	720	30	120	0.25
		30	208	0.14
		30	240	0.13
		30	277	0.11
1	1100	45	120	0.38
		45	208	0.22
		45	240	0.19
		45	277	0.16
1	1750	70	120	0.58
		70	208	0.34
		70	240	0.29
		70	277	0.25
1	2200	90	120	0.75
		90	208	0.43
		90	240	0.38
		90	277	0.32
2	3500	135	120	1.13
		135	208	0.65
		135	240	0.56
		135	277	0.49

Application



DVDLIGHTS - INDUSTRIAL & COMMERCIAL LED LIGHTING COMPANY - 395 SERIES TRADITIONAL LED WALL PACK