



Industry & Commercial LED Lighting Company

4403 Greenbriar Dr, Stafford, Texas 77477
Tel No. 1-800-8385070
Monday - Friday 8:30 AM to 5:30 PM

CCT SELECTABLE LED DOWNLIGHT



Introduction:

- Downlight body and endcaps are both fabricated from aluminum for maximum rigidity.
- Spring clips for easy installation.

Product Features:

- Default Wattage is the highest wattage:
 - 6" – 22W
 - 8" – 30W
- Default CCT: 5,000K
- Commercial grade
- IP43 rated – wet location
- 50,000 hours lifetime

Electrical:

- Uses a -20°C to 40°C (-4°F to 104°F) case temperature drive.
- Available as 110-277V input.

Optical System:

- Frosted lens. 120° beam angle.

Dimming:



- Dimmable range from 0-10V.

Installation & Mounting:

- Use torsion spring clips to install in place.

MODEL NUMBER – 3,000K 4,000K 5,000K	WATTAGE	LUMENS	EFFICACY	CRI	POWER FACTOR	REPLACES
577D2-22W	10W / 15W / 22W	900LM / 1,350LM / 1,950LM	88.6LM/W	94	0.98	60W / 100W / 150W
577X2-30W	12W / 20W / 30W	1,050LM / 1,650LM / 2,350LM	76.7LM/W	93	0.98	100W / 150W / 200W

Dimensions & Weight

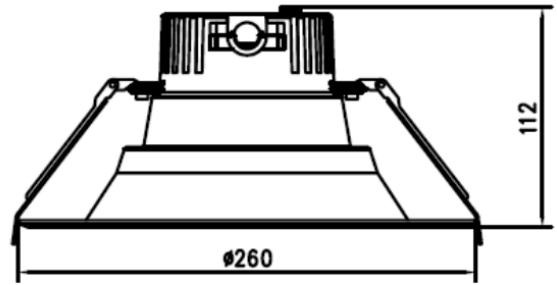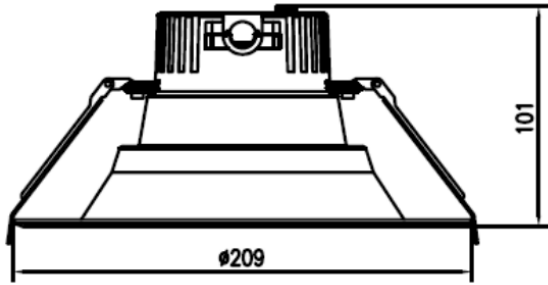

MODEL	QUANTITY	WEIGHT	UPC CODE
577D2-22W	1	lbs	00815586025695
577D2-30W	1	lbs	00815586025701

Light Series

Series	Size	Wattage Options	CCT Options
577D2-22W	6"	10W / 15W / 22W	3,000K
577D2-30W	8"	12W / 20W / 30W	4,000K 5,000K