



Industrial & Commercial LED Lighting Company

4403 Greenbriar Dr, Stafford, Texas 77477
Tel No. 1-800-8385070
Monday - Friday 8:30 AM to 5:30 PM

FLUSH MOUNT CEILING LED TROFFER



Product Features:

- Constructed of die-formed heavy gauge cold rolled steel
- Opal white PVC(PC) overlay diffuser for visual comfort
- Latch-free perforated center basket for easier mounting
- Indirect reflectors are precision formed and contoured to provide soft, low-glare, indirect illumination while maintaining high efficiency and a broad, uniform light
- Painted with a lighting grade baked matt enamel, having a high reflectance factor for premium
- Designed for mounting into T-bar ceiling grids
- Suitable for T5 T8 and PLL configurations
- Available in one, two, three lamps model
- Available in 24-inch and 48 inch
- Recessed T-bar

Electrical:


- G13 G5 lamp holder from BJB,AAG stuck, or others
- Terminal block, Quick disconnecter from IDEAL or WAGO
- ADVANCE, FULHAM, GE, SYLVANIA, UNIVERSAL ballast, etc.
- Emergency kits or dimmable ballast, occupancy sensor
- Linear fluorescent lamps from GE, Philips, Osram, etc.
- CE,CB, CSA, UL Cul listed

Suitable Application:

- Canopies
- Corridors
- Stairwells
- Public room
- Utility Areas

Dimension & Weight

Model	Lamp type	Lamps	Dimension(L*W*H):Inch		
LD-MX892-Y32x3	F32T8	3X32W	47 5/8	23 5/8	5 4/8

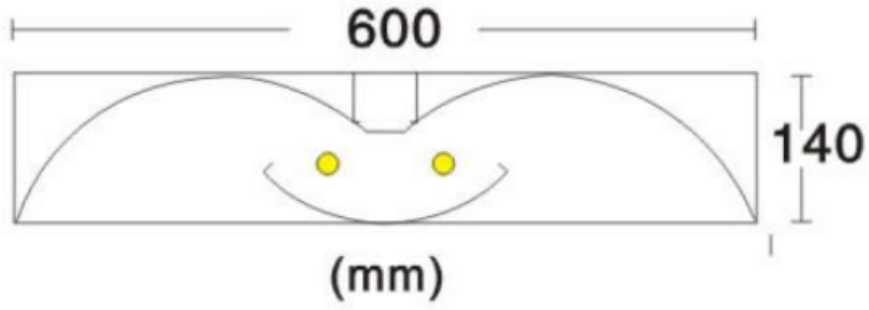

NOTE: T8 fluorescent tube US 17W=NON-US 18W, US32W=NON US 36W